

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 501.38452X00

First Inventor or Application Identifier Seishi HANAOKA, ET AL.

Title CONTROL METHOD OF CHANNEL ASSIGN

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 44] 1
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 19] 1
4. Oath or Declaration [Total Pages 4] 1
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application
(PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

020457

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

CARL J. BRUNDIDGE

Registration No. (Attorney/Agent)

29,621

Signature

Date

04/07/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

CONTROL METHOD OF CHANNEL ASSIGN

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a control method of channel assign with respect to a communication apparatus (base station) that processes data communicated through a plurality of channels. More particularly, the present invention relates to a communication apparatus suitably employable for a mobile communication system operated with use of a CDMA (Code Division Multiple Access) method.

Description of Related Art

In recent years, mobile communications are demanded of various information transmission services, such as large capacity fast data communications of dynamic pictures, etc. in addition to conventional voice and data communications. In order to meet such a variety of service demands from many users, each base station is required to have a signal processing unit composed of a huge size circuit.

Fig.1 shows a configuration of such a conventional base station used for a CDMA mobile communication system. In this case, voice communications are represented as low speed data rate communication services and data communications are represented as high speed data rate

communication services. Although both voice communications and data communications are described below, communication services are not limited only to those; they are just picked up so as to denote that a base station is required to support a plurality of communication services supplied at different transmission rates.

A carrier frequency band signal received by an antenna 100 is converted to a base band received signal in an RF (Radio Frequency) unit 101, then entered to a base band unit 134. Each channel base band signal output from the base band unit 134 is superimposed with others in an output combination unit 107, then converted to a carrier frequency band signal and transmitted from the antenna 100.

In the base band unit 134, modem processing units 102-1 to 102-s are prepared in accordance with the number of channels (s) used in the base station. Each modem processing unit 102 is used to transmit/receive signals of one channel. A matched filter (MF) 135 and a peak detector 136 are provided for a group of channels respectively, so that path searching is done in each channel intermittently. The peak detector 136 selects a larger correlation value (denoting a multi-path receiving timing) of correlation values output from the MF. The selected path timing is set for a correlator 108-1 to n (n: number of fingers) of a modem processing unit

102-1 to 102-s of the corresponding channel so as to carry out a despreading processing for each finger.

In each base station, path searching is done for each channel periodically in a time sharing manner as described above. Consequently, an MF can be shared by a plurality of channels, thereby the system circuit is reduced in size. Even in this case, however, because each channel is provided with a modem processing unit 102, the modem processing unit 102 must be prepared as many as the number of users in the system.

Furthermore, for a high speed user transmission rate, each block operation must be speeded up and accordingly, the circuitry is expanded in size, although the block configuration of the modem processing unit 102 remains the same.

If a base station supports both voice and high speed data communication services, the modem processing unit 102 provided for each channel is roughly classified into the following two configuration types.

One of the two types is a configuration in which the modem processing unit for voices 201-1 to i and the modem processing unit for high speed data communications 202-1 to j in the base band unit 134 shown in Fig.2 are prepared as many as the number of system-supported users. The number of users for high speed data communications is more than the

002070-6477560

number of users for voice communications. However, because the transmission rate is high, the processing block circuit size for high speed data communications comes to be larger than that for voice communications.

The other type configuration is as shown in Fig.3; the high performance modem processing unit for voice/data communications 301 is provided as many as the number of system-supported users (301-1 to k), so that both voice and data communications are processed in a common processing block. The inner configuration of the base band unit 134 is only a difference between Fig.2 and Fig.3. The configurations of the RF unit 101, the output combination unit 107, and other components in Fig.3 are the same as those in Fig.2.

summary of the Invention

In the configuration shown in Fig.2, both modem processing units 201 and 202 are required for voice and data communications, thereby the hardware is expanded in size. If the hardware composed as shown in Fig.2 is used as a base station, each signal entered to a modem processing unit is identified for a voice communication signal or a high speed data communication signal, then a idle channel is assigned for the signal. In this configuration shown in Fig.2, a voice communication channel is assigned independently of a

data communication channel; the same channel cannot be used for both communication types.

On the other hand, in the hardware configuration shown in Fig.3, the modem processing unit 301 can process signals of both voice and data communications. If the hardware composed as shown in Fig.3 is used, therefore, identification between voice and data communication signals is omissible and channel assign is done for each signal if there is a idle channel. Because this controlling method does not depend on the type of signals entered to the modem processing unit in this case, the channel assign is done more simply than that of the hardware configuration shown in Fig.2. Although all the users in the system do not request the maximum transmission rate service (for example, high speed data communication), each processing block hardware in the modem processing unit is composed so as to cope with the maximum number of users who may possibly request the maximum transmission rate service. The usage efficiency of the hardware resources is therefore not so high. In addition, the hardware must be expanded more in size so as to cope with the maximum transmission rate service than that of the hardware employed only to process voice data. Consequently, the hardware size of the base station especially for processing signals from many users is expanded excessively comparing with the processing load of

002040 6444550

normal system. This has been a problem of the conventional technique.

The conventional technique has also been confronted with another similar problem, which arises when a base station is composed as a fault-tolerant one so as to continue the system operation even when the system is partially down. In order to compose a base station as a fault-tolerant one, a method is employed so that a spare apparatus and another spare running system provided with switching means are disposed in addition to the normal running system. Unlike the hardware configuration shown in Fig.2, the hardware configuration shown in Fig.4 is thus provided with a spare running base band unit. In Fig.4, two types of spare hardware units must be provided; the voice processing block 410 and the data processing block 411. This is because a voice channel and a data channel are independent of each other and the same channel cannot be used commonly for both communication types.

The conventional technique has been confronted with further another problem; the hardware for a base station that supports a hand-over processing over sectors is expanded in size.

A base station divides its control range (cell: 501) into a plurality of sectors (502-1 to 501-3) with use of directional antennas (504) as shown in Fig.5. If a mobile

station 505 moves and the control range is changed from a sector to another, a hand-over processing is required to keep the communication. In the case of the CDMA method, such a hand-over processing is done without instantaneous disconnection, so the mobile station comes to communicate with two or three base stations simultaneously for a while.

When taking the hand-over processing into consideration, a base station is composed of a receiving card 601 prepared for each sector and a sector combination card 602 prepared for sector combination as shown in Fig.6. Those cards 601 and 602 are connected to each other through a bus 603. In a hand-over processing, the base station transmits a signal received from a sector through a receiving card 601-m and a signal received from another sector through a receiving card 601-n to a sector combination card 602-p through the data collection bus 603, thereby signals from those sectors are combined in the sector combination card 602-p.

In order to combine signals received by different receiving cards over sectors, a bus configuration as shown in Fig.6 can be selected. The bus configuration enables every combination of a receiving card and a sector combination card to be connected to each other. However, this configuration cannot avoid a problem that the receiving function must be separated from the inter-sector combining

function, so that it is difficult to integrate both functions in the same card or in the same chip.

In particular, when a base band is composed of many sectors, it will be difficult to distribute the signals from all the sectors to all the receiving cards. Because it is small in possibility that a plurality of received signals are processed in a hand-over processing over sensors in the same receiving card, the hand-over processing over sectors in the same card often fails, thereby integration of receiving card and sector combination card becomes more difficult.

Under the circumstances, it is an object of the present invention to provide a method for multiplexing processings of a plurality of channels and high speed transmission rate channel processings by reading data from a storage means at a higher rate than that of data input to the storage means with use of a signal processing unit provided with a storage for storing signals entered from a plurality of channels and a calculation means necessary for modulation and demodulation.

When employing the above-described method, a hardware unit is used to multiplex processings of a plurality of channels, thereby the hardware can be reduced significantly in size. In addition, it is no need to prepare a hardware unit for each channel, thereby channel assign can be

controlled so as to disperse processings so that the load of the base station is not concentrated on a specific hardware or software processing.

Furthermore, in a hand-over processing over sectors, channel assign can be controlled so as to enable a hardware unit to process signals exchanged with a plurality of sectors, thereby it makes easier to carry out the hand-over processing over sectors.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 is a block diagram of a conventional base station.

Fig.2 is a block diagram of a conventional base station supporting both voice and high speed data communications with use of hardware units for both communication types.

Fig.3 is a block diagram of a conventional base station for realizing both voice and high speed data communications with use of a large size and high speed hardware unit that can cope with both communication types.

Fig.4 is a block diagram of a conventional base station that adds a spare running system to the base band unit configuration shown in Fig.2, thereby realizing a fault-tolerant system.

Fig.5 shows a base station divided into a plurality of sectors with use of directional antennas.

Fig.6 is a block diagram of a conventional base station supporting a hand-over processing.

Fig.7 shows a format of a physical channel in an uplink line of the W-CDMA method.

Fig.8 is a block diagram of a base station in the first embodiment of the present invention.

Fig.9 is an example of the channel assign method when the hardware configuration shown in Fig.8 is employed.

Fig.10 is an example of the channel assign method in the second embodiment 2 when the hardware configuration shown in Fig.8 is employed.

Fig.11 is a block diagram of the base station in the third embodiment, in which a modem processing unit is composed of a plurality of hardware units.

Fig.12 shows an example of channel assign method when the hardware configuration shown in Fig.11 is employed.

Fig.13 is a block diagram of a base band unit that employs the engine method in the fourth embodiment of the present invention.

Fig.14 shows a channel assign method employed for a controller when an engine method is employed.

Fig.15 shows a channel assign method employed for the controller when an engine method is employed for a plurality of hardware units as shown in Fig.11.

Fig.16 shows how a fault-tolerant system is realized due to the channel assign employed for the controller when an engine method is employed for a plurality of hardware units as shown in Fig.11 in the fifth embodiment of the present invention.

Fig.17 shows a signal combination procedure over sectors in the sixth embodiment of the present invention.

Fig.18 is a block diagram of a downlink channel transmission on-off mechanism employed in the sixth embodiment of the present invention.

Fig.19 shows timings of the movement of a downlink channel among LSI's in the sixth embodiment of the present invention.

Fig.20 shows how a base station communicates with a mobile station provided with a function for transmitting and receiving signals with use of a plurality of frequencies.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig.7 shows a communication format of data transmitted from a mobile station to a base station with use of an uplink line in a W-CDMA system. One frame 701 (=10msec) is a basic unit of such a channel codec processing as

interleaving, error correction encoding, etc. One frame is further divided into 16 slots. One slot 702 ($=0.625\text{msec}$) is a basic unit of an air interface control as channel estimation, transmission power control, etc. One slot is further divided into I content and Q content. The I content receives a data symbol 703 and the Q content receives such control symbols as a pilot signal 704. One symbol 707 is a basic unit of channel-codec-processed transmit data. In the CDMA system, this one symbol is multiplied by a pseudo random signal referred to as a PN series signal, thereby executing a spectrum diffusion processing. One chip 708 is a basic unit of pseudo random signals. One chip 708 is the minimum unit in all the processings.

Hereunder, the first embodiment of the present invention will be described with reference to the accompanying drawings.

Fig.8 shows a hardware block diagram of a base station in the first embodiment of the present invention.

Carrier frequency band signals received by antennas 800-1 to 800-p are converted to base band signals by an RF unit 801. The base band signals are then stored in buffer memories 803-1 to 3 provided so as to be corresponded to an antenna respectively. These buffer memories may be united into one as a memory consisting of a plurality of regions.

Each of the buffer memories 803-1 to 3 should be able to store data in multiple of the maximum unit of modem processing (for example, one frame in the W-CDMA system). The capacity of each buffer memory is decided properly by a difference between the data rate of the RF channel and the calculation speed of the base band unit 802, as well as the number of channels processed in a multiplexing manner by the modem processing unit 830. In addition, the number of channels to be processed in a multiplexing manner by one base band unit is less than (calculation speed of the base band unit/data rate of the RF channel).

Base band signals stored in the buffer memories 803-1 to 3 include all the multiplexed data of all the mobile stations in the subject sector service area. The multiplexed data is then read into the modem processing unit 830 repetitively so as to be demodulated, thereby the hardware size is reduced and the LSI calculation speed can be used effectively for the demodulation. In addition, the modem processing unit 830 modulates transmit data repetitively and the generated base band transmit signals are stored in corresponding buffer memories so as to be classified by sector therein. The base band signals of all the channels, classified by sector and multiplexed in the LSI and stored in buffer memories 803-1 to 3, are combined in the output combination unit 807. In the output

combination unit 807, all transmit signals from all LSIs of the subject base station are combined. Multiplexed base band transmit signals are converted to carrier frequency band transmit signals, then transmitted from the antennas 800. The hardware size can thus be reduced and the LSI calculation speed can be used effectively for the modulation of those signals.

If the hardware configuration shown in Fig.8 is employed, the channel assign in the base station controller 838 becomes as shown in the sequence in Fig.9. In this case, it is premised that the modem processing unit 830 is composed of only one hardware unit and the time is divided into a plurality of processing time units (slots), then each slot is assigned with a channel to process, thereby channel processings are executed in a time sharing manner. The "time sharing" mentioned here means a processing method in which a processing channel is switched to another at each processing time unit (slot) and the channel processing is executed exclusively in the processing time unit (slot).

In the channel assignment sequence shown in Fig.9, at first, the base station controller checks idle slots beginning at the first slot. The controller, if finding a idle slot, assigns the slot as the channel processing time (907). If the first slot is not idle, the controller makes the same check for the next slot (903 to 905). If there is

no idle slot in such a check, the controller refuses the call connection (906). However, note that this method requires a management table used to denote a channel processing assigned to a slot (909). According to this channel assign method, one slot can be assigned to a voice terminal and a plurality of slots can be assigned to a high speed data terminal, thereby coping with both voice and data terminal services with use of one hardware unit.

Next, the second embodiment of the present invention will be described.

Fig.10 shows a flowchart of the channel assign in the second embodiment of the present invention. The base station configuration in Fig.10 is the same as that shown in Fig.8. However, the channel assign method in the base station controller 838 takes a different sequence from that shown in Fig.9. In Fig.10, the modem processing unit 830 is composed of one hardware unit and the modem processing unit 830 is provided with a capacity enough to process a plurality of channels simultaneously with use of a software program for operating the hardware. Each channel processing state is managed by a flag and this flag is checked to know the end of each processing unit, thereby processings of a plurality of channels are executed in a time multiplexing manner within a unit time. The "time multiplexing" means a processing method in which data from a plurality of

In Fig.10, at first, the controller checks the load of the modem processing unit 830, thereby checking the channel processing for overload or not (1002). The "load" mentioned here is defined as an amount of software processing needed for processing a plurality of channels. The maximum processing amount in the modem processing unit is defined as an allowable load. The "overload" state means a state in which a load exceeding the allowable load is applied on the modem processing unit and the subject processing cannot be ended perfectly within the unit time.

The processing load of the modem processing unit 830 may be known as follows; the controller checks an approximate load value of the modem processing unit 830, which is to be applied to one channel beforehand, then updates the load according to the known load value each time a new channel is assigned or the controller 838 may exchange control signals with the modem processing unit 830 so as to know the load of the modem processing unit 830.

If it is judged not to be overloaded as a result of the check, a channel is assigned (1003 to 1008). If it is judged to be overloaded, the controller rejects the calling (1009).

According to the method described with reference to Fig.10, flag management is employed for processing a plurality of channels. Consequently, one hardware unit can correspond to both voice and data terminal services so as to cope with the maximum possible processing capacity.

Next, the third embodiment of the present invention will be described.

Fig.11 shows a hardware block diagram of a base station in the third embodiment of the present invention. In Fig.11, only the method for composing the modem processing unit 830 differs from that shown in Fig.8. More concretely, although one modem processing unit processes all the channels supported in the base station in Fig.8, a plurality of base band processing CPU/base band processing hardware units 1101-1 to m are used to process those channels in Fig.11. This is only a difference between Fig.8 and Fig.11.

If the hardware configuration shown in Fig.11 is employed, the channel assign in the base station will be as shown in the sequence in Fig.12. Concretely, receiving a call request, the controller checks the load of the modem

processing unit (1202). If the state is overload, the controller checks the next modem processing unit hardware (1208) if the use of the hardware is expected to cause overload in the object processing. If decided not, the controller checks the hardware for a idle channel (1209). If a idle channel is found, the controller assigns the channel (1212). If no idle channel is found and the use of the hardware is expected to cause overload in the processing, the controller further checks the next modem processing unit hardware.

Because the channel assign method shown in Fig.12 can use a function for checking the software for processing a plurality of hardware units for overload, the processing load can be dispersed properly.

Next, the fourth embodiment of the present invention will be described.

Fig.13 shows a block diagram of a base station base band unit in the fourth embodiment of the present invention. This hardware configuration is decided by turning attention to the processings to appear in units of a symbol, a slot, and a frame. In this embodiment, a modem processing block is divided into processing units and each processing block is composed so as to be operated independently. If processings whose processing units are different from each another are executed one by one, the symbol unit processing

speed decides the whole processing speed, thereby slot and frame processings whose processing units are large degrade the use efficiency of the hardware. To avoid such a problem, the processings having the same processing unit are grouped in a block in this embodiment. Then, setting an operation speed of each block or plural blocks in parallel, thereby the use efficiency of the whole hardware is improved. For example, a plurality of symbol interval calculation engines 1303 are disposed in parallel in Fig.13. Otherwise, the slot interval calculation engine 1305 is operated faster than the frame interval calculation engine 1307.

Base band received signals are stored in the first buffer memory 1302 in multiple of a symbol, which is a processing unit of the symbol interval calculation engine 1303. In order to fix the processing switching timing, a fixed amount of received signals are kept entered to the base band unit even when one symbol length differs among channels. For example, if the length of one symbol for a channel whose symbol interval is the largest is decided as a processing unit, channels are switched for one symbol at least (the maximum symbol interval in the W-CDMA) and for 16 symbols in maximum (the minimum symbol interval in the W-CDMA) for processing.

The symbol interval calculation engine 1303 is a block for executing a modem processing for each symbol. The symbol

interval calculation engine 1303 exchanges data with the slot interval calculation engine 1305 through the second buffer memory 1304. The second buffer memory 1304 stores data in multiple of one slot, which is a processing unit of the slot interval calculation engine 1305 so as to prevent a received signal that is not processed yet from being overwritten by another signal. The second buffer memory 1304 is prepared for each channel.

The slot interval calculation engine 1305 is a block for executing a modem processing slot by slot. The slot interval calculation engine 1305 exchanges data with the frame interval calculation engine 1307 through the third buffer memory 1306. The third buffer memory 1306 is also prepared for each channel and stores data in multiple of a frame.

The frame interval calculation engine 1307 is a block for executing a modem processing frame by frame. The frame interval calculation engine 1307 is also used for an interleaving processing, etc. to be executed in units of more than one frame.

The control engine 1301 controls each engine. Each of the engines 1303, 1305, and 1307 executes a modem processing asynchronously with each other under the control of the control engine 1301. Each channel is also processed independently by each engine. Consequently, it is possible

2

2

The channel assign in the base station controller will be as shown in Fig.14. At first, the controller checks the object engine CPU for overload when a call request is detected (1402). If the CPU is not overloaded, the controller finds a idle channel. If it is found, the controller assigns the channel to the control engine 1401 (1407). At this time, the base station controller is only requested to instruct the control engine 1301 to assign a channel (1407). Thus, the control engine 1301 divides the channel processing into the symbol interval calculation engine and the slot interval calculation engine and schedules those processings. If there is no idle channel, the controller checks the next channel (1403 to 1405). If all the channels are busy, the call is rejected.

In the case of Fig.15, there is a plurality of base band units, each employing an engine method. Consequently, the controller checks the first CPU for overload when a call request is detected (1502). If the CPU is overloaded, the controller checks the next CPU for overload (1508). If the CPU is not overloaded, the controller assigns a channel to the CPU. If the CPU is also overloaded, the controller checks the next CPU for overload in the same way and attempts to assign a channel to the CPU.

The channel assign method as shown in Fig.15 is thus effective to disperse the processing load of the system hardware, since the method is provided with such a function for checking a plurality of CPUs for overload.

In order to shorten the time required for controlling channel assign, a channel should preferably be assigned to each hardware evenly. This is because it is possible to end channel assign earlier if a channel is assigned to each CPU so as to reduce the number of nearly overloaded CPUs while CPUs are checked for overload sequentially in the control flow. If the function for checking each CPU for overload as shown in Fig.15 is optimized for the CPU so as to disperse the load, the channel assign method described above will make it possible to reduce the channel assign time successfully.

Furthermore, it should be avoided to operate a plurality of hardware units from the point of view of power consumption; only the minimum necessary number of hardware units should be used. In this case, the function for checking overload or not as shown in Fig.15 may be optimized to minimize the power consumption, thereby the channel assign method will be able to reduce the power consumption.

The channel assign method shown in Figs.14 and 15 are almost the same as that (Figs. 10 and 12) when the hardware configuration shown in Figs.8 and 11 is employed. According to the evaluation on the basis of the hardware usage efficiency, however, the hardware configuration, when an engine method is employed, will be much more efficient.

Next, the fifth embodiment of the present invention will be described.

Taking the fault-tolerant property of a base station into consideration, the conventional method has prepared a spare hardware as shown in Fig.4 so as to assure the safety of the system. Switching control to the spare hardware has thus been needed. If a base station employs an engine method, however, it is only required to prepare the number of hardware units more than the number of users supported by the system. The engine method divides a processing by a processing time unit, thereby data can be processed regardless of the user's communication type (voice/data

Controlling of channel assign in such a processing will become as shown in Fig.16. The channel assign is the same as that shown in Fig.15. Because the CPU load check is not done correctly for the hardware 1608, which is down, channel assign is done for the next hardware (CPU) by avoiding the down hardware 1608, thereby achieving the fault-tolerant property against hardware faults.

Next, a hand-over processing of the present invention will be described as the sixth embodiment of the present invention.

In the sixth embodiment, a code-division multiple connection base station apparatus is employed. The apparatus is provided with a plurality of base band processing CPU/base band processing hardware units (1101-1 to 1101-m) as shown in Fig.11. Signals received by each of a plurality of antennas (800-1 to 800-p) are converted to

base band signals in the RF unit (801) and transferred to one of the m base band processing CPU/base band processing hardware units (1101-1 to 1101-m) through an RF interface (804-1 to 804-p), a buffer memory (803), and a selector (1102). Each of the m base band processing CPU/base band processing hardware units (1101-1 to 1101-m) can have r channels, so that the entire base station comes to have m x r channels in maximum. The received signals, converted to base band signals, are transmitted to a base station controller through an HW-IF (1105).

On the other hand, transmit signals are transferred to one of the m base band processing CPU/base band processing hardware units (1101-1 to 1101-m) through the HW-IF (1105). The transmit signals, converted to base band signals, are transmitted from antennas (800-1 to 800-p) through a selector (1102), a buffer memory (803), and further through the output combination unit (807) and the RF unit (801).

In Fig.5, if a mobile station (505) outputs a hand-over request so as to begin exchanges of signals with a sector B (502-2) in addition to the sector A (502-3) with which the mobile station (505) have exchanged signals so far, then the base station must set a channel for the sector B (502-2). At this time, the code-division multiple connection mobile communication base station apparatus of the present invention can cope with the processing with use

Hereunder, the base band processing CPU/base band processing hardware (1101-m) will be referred to as LSI #m and the mobile source channel as a channel A, and the mobile destination channel as a channel B so as to simplify the description.

(1) If the LSI #m holding the source channel A still has a margin for holding a destination channel B, the destination channel B is set in the LSI #m as it is.

(3) If the LSI #m holding the source channel A does not have a margin for further holding the destination channel B and any of other LSIs, which does not have a margin for holding both channels A and B now, can hold both channels A and B in the same LSI by changing the channel assign to the present LSI once or more times, then the channel assign

to the LSI is changed so that both channels A and B are assigned to one and the same LSI.

(4) If it is impossible to assign both channels A and B to the same LSI even by changing the channel assign to the present LSI, then "hand-over disabled" is reported to the base station controller.

For the procedure (2) or (3), the channel assign to the present LSI must be changed to a different LSI. Fig.17 shows such a reassignment especially for the procedure (2). For the procedure (2), when the channel B is set, the channels A and B must be combined so as to output the combined signal. For the procedure (3), resetting of the channel assign to each LSI can be completed by repeating the same channel assign change procedure as that in (2).

The function for combining signals over sectors in the same LSI by moving a channel between LSIs is realized through communications of control signals among the controller (1103), each LSI, and the HW-IF (1105). Of the control signals shown in Fig.17, those indicated with black circles are used to change channel assign. The controller (1103), when receiving a channel assign change request, transmits commands for holding both channels A and B, as well as for combining signals over sectors (1702) and transmits the spreading codes of both channels A and B necessary to hold them (1703) to the LSI#n. The LSI#n (1702), after holding

the channels A and B and outputs the completion signal of combination of both channels successfully, transmits the completion report to the controller (1103) (1704). The controller (1103) then notifies the HW-IF (1105) of the change of channel assign (1705). Notified of the change, the HW-IF (1105) switches the output of the signal from the mobile RF station (505) to the line from LSI#m (1701) to LSI#n (1702) and notifies the controller (1103) of the completion of the assignment change (1706). Finally, the controller (1103) instructs the LSI#m (1701) to reset the assignment of the channel A (1707). The LSI#m thus resets the assignment and notifies the controller (1103) of the completion. Receiving the completion report (1103), the controller (1103) completes the channel movement between LSIs and the combination of signals between sectors (1708). This procedure can thus enable seamless channel movement between LSIs as described above.

On the other hand, if both uplink and downlink channels are processed in the same LSI so as to control signal transmission output, the same function and the same procedure for seamless movement of channels between LSIs are required for the downlink channel. In the base station, however, signals of a downlink channel, which is at the transmission side, are output from the LSI after the signals are combined with those of the other downlink channels, so

it is difficult in the uplink channel to select each channel by on-off of the transmission output after the signal is output from the LSI just like in the HW-IF (1105).

Consequently, the output on/off for each channel is done before addition/combination of the transmit signals in the LSI. Fig.18 shows this function. Fig.18 represents the transmission side output unit of one base band processing CPU/base band processing hardware unit. Numerals 1801-1 to 1801-r denote spreading modulators for r channels. After the spreading, the r channels are multiplied for the output power by multipliers (1802-1 to 1802-r) and added up and combined in the output combination unit 1803, then output from the LSI through the transmission/receiving IF 1804. The output power is specified by the controller provided outside the LSI through the controller IF 1805. If "0" is specified for the output power, the output of any downlink channel can be turned off. More concretely, if "0" can be output as an output power, the output control mechanism for controlling the output of each channel can also be used as an output on/off mechanism of each channel.

In order to turn on/off a transmit signal so as to be synchronized between different LSIs after a spreading modulation processing as shown in Fig.18, thereby switching channels, the switching command must be synchronized between those LSIs. This synchronization is enabled with

use of a timing signal used commonly in the entire base station. In this embodiment, a frame number used commonly in the whole base station is used especially as such a timing signal. Fig.19 shows switching timings for moving a downlink channel from LSI to LSI. However, sometimes a difference occurs between arrival times of a switching command issued by the controller between different LSIs at the timing (a) in Fig.19, thereby the switching command arrives in LSI#n and LSI#m with a frame timing therebetween as shown in (b) and (c). If the channel switching execution timing is set at "when the switching command arrives" or "at the first frame timing after the switching command arrives", the arrived switching command execution timing differs between (b) and (c), thereby the simultaneous channel switching with precision of chip timing is disabled. If the channel switching timing is set "at a frame timing (d) when the frame number used commonly in the whole base station is incremented by 2 from the timing (a)", the switching timing can be synchronized between both LSIs in each chip even when a frame timing is set between (b) and (c) as shown in Fig.19.

As described above, it is possible to change the assignment of both uplink and downlink channels to an LSI, thereby both source and destination channels can be held in the same base band processing CPU/base band processing hardware.

Next, the seventh embodiment of the present invention will be described. In this seventh embodiment, the base station in the sixth embodiment communicates with a mobile station provided with a function for transmitting/receiving signals simultaneously with use of a plurality of frequencies. The base station in this case is composed as shown in Fig.20 and provided with a plurality of antennas for receiving signals arriving with different frequencies. In Fig.20, only the antennas (2001-A) and (2001-B) are shown. The antenna (2001-A) receives a signal transmitted with a frequency f_A from a mobile station and the antenna (2001-B) receives a signal transmitted with a frequency f_B from a mobile station. The hardware configuration of the base station is the same as that shown in Fig.14. Hereunder, the base band processing CPU/base band processing hardware (1101-m) is referred to as LSI#m so as to simplify the description.

When communicating with a mobile station provided with a function for transmitting/receiving signals with use of a plurality of frequencies simultaneously, the code-division multiple connection mobile communication base station apparatus of the present invention de-modulates a received signal with a frequency from the mobile station independently, then combines the signal with other signals, thereby obtaining a diversity effect. To combine those

signals, each of those signals must be held in the same LSI. The code-division multiple connection mobile communication base station apparatus of the present invention is provided with a function for holding a channel transmitted with a frequency f_A from the mobile station and another channel transmitted with another frequency from the same mobile station so as to enable the processing. More concretely, if the LSI #m has already held a channel transmitted with a frequency f_A from a mobile station and the LSI #m is to hold another channel transmitted with another frequency f_B from the same mobile station, one of the following procedures (1) to (4) can be used according to the state of the base band processing CPU/base band processing hardware.

(1) If the LSI #m holding a channel transmitted with a frequency f_A still has a margin for holding another channel transmitted with another frequency f_B , the LSI #m holds the new channel transmitted with the frequency f_B as it is.

(2) If the LSI #m holding a channel transmitted with a frequency f_A does not have a margin for holding another channel transmitted with another frequency f_B and another LSI #n can hold both channels transmitted with different frequencies f_A and f_B , the LSI #n holds the channel transmitted with the frequency f_B and the LSI #n holds the channel transmitted with the frequency f_A ; concretely, the channel assign to LSI #m is changed to LSI #n.

(3) If the LSI #m holding the channel transmitted with the frequency fA does not have a margin for holding another channel transmitted with another frequency fB and any of other LSIs, which do not have a margin for holding both channels transmitted with different frequencies fA and fB, can hold both channels transmitted with different frequencies fA and fB by changing the channel assign to the LSI once or more times, then the channel assign to the LSI is changed, thereby both channels transmitted with different frequencies fA and fB are held in the same LSI.

(4) If the same LSI cannot hold both channels transmitted with different frequencies fA and fB even with changes of channel assign, "combination of those signals disabled" is notified to the base station controller.

Hereafter, a channel transmitted with a frequency fA from a mobile station will be referred to as channel A and a channel transmitted with a frequency fB from a mobile station will be referred to as channel B so as to simplify the description. Consequently, just like in the sixth embodiment, seamless changes of channel assign and combination of signals can be started with use of the procedure shown in Fig.17.

As described above, when communicating with a mobile station provided with a function for transmitting/receiving signals with use of a plurality of frequencies, it is

possible to combine signals transmitted from a plurality of mobile stations with different frequencies in the same LSI, thereby obtaining a diversity effect.

Because each modem processing in the base band unit is divided into processing units and processings of a plurality of channels are processed in those divided calculators in a time-multiplexing manner, the system hardware can be reduced in size and because the hardware configuration employs this method, the processing load of the base station is dispersed, thereby channel assign can be controlled so that hardware resources and software processings can be distributed to a plurality of users who are using different transmission rates.

The hardware, when employing this method, can also be used for both voice and high speed data communications, as well as mixed communications of both voice and high speed data. In addition, with use of a function for checking over or not over an allowable load, the system can be constructed easily as a fault-tolerant one.

Because the present invention can prepare a procedure for retrying holding of a plurality of signals from different sectors to be combined in the same base band demodulator in a hand-over processing, it is possible to integrate both receiving function and inter-sector combining function in a card or chip. In addition, the

present invention can omit a bus structure needed to collect data from a plurality of boards or chips. Even when it is difficult to distribute signals to all the base band demodulators from all the sectors generated due to the employed multi-sector method, the present invention can change signal assignment among those demodulators, thereby channel assign can be realized flexibly so as to make it easier to combine signals from sectors.

004040" 624444560

WHAT IS CLAIMED IS:

1. A control method of channel assign to a modem processing means of an RF base station so as to demodulate a base band received signal and modulate a transmit data signal, said modem processing means operating in a time-sharing manner;

wherein said channel assign for demodulating said base band received signal is done in the following steps of;

converting a plurality of carrier frequency band signals received by a plurality of antennas provided in said RF base station to a plurality of base band received signals in an RF unit;

storing a plurality of said base band received signals in a buffer memory; and

assigning a channel to said modem processing means, said channel being used for demodulating a plurality of said base band received signals received from said buffer memory; and

channel assign for demodulating said base band received signals and channel assign for modulating said transmit data signals are done in the following steps of;

enabling a controller to check a time slot;

assigning a channel in a idle time slot if said idle time slot is found; and

002040-044450

2. A control method of channel assign to a modem processing unit of an RF base station so as to demodulate a base band received signal and modulate a transmit data signal, said modem processing unit operating in a time-multiplexing manner;

converting a plurality of carrier frequency band signals received by a plurality of antennas provided in said RF base station to a plurality of base band received signals in an RF unit;

assigning a channel to said modem processing unit, said channel being used for demodulating a plurality of said base band signals received from said buffer memory; and

enabling a controller to check the load of said modem processing unit; and

enabling said modem processing unit to assign a channel to said modem processing unit if said modem processing unit still has a load margin.

3. A control method of channel assign to a plurality of modem processing means of an RF base station so as to demodulate a base band received signal and modulate a transmit data signal, said modem processing means operating in a time-multiplexing manner respectively;

wherein said channel assign for demodulating said base band received signal is done in the following steps of;

converting a plurality of carrier frequency band signals received by a plurality of antennas provided in an RF base station to a plurality of base band received signals in an RF unit;

storing a plurality of said base band received signals in a buffer memory; and

assigning a channel to said modem processing means respectively, said channel being used for demodulating a plurality of said base band signals received from said buffer memory; then

channel assign for demodulating said base band received signals and channel assign for modulating said transmit data signals are done in the following steps of;

enabling a controller to check the loads of a plurality of said modem processing units so that a channel is assigned

002040-544450

to a modem processing means still having a load margin if there are a plurality of said modem processing means still having a load margin respectively.

4. A control method of channel assign to a modem processing unit of an RF base station so as to demodulate a base band received signal and modulate a transmit data signal, said modem processing unit operating in a time-multiplexing manner and being provided with a plurality of calculation means blocks, each provided for a plurality of calculation means having the same calculation interval;

wherein said channel assign for demodulating said base band received signal is done in the following steps of;

converting a plurality of carrier frequency band signals received by a plurality of antennas provided in said RF base station to a plurality of base band received signals in an RF unit;

storing a plurality of said base band received signals
in a buffer memory; and

assigning a channel to said modem processing unit, said channel being used for demodulating a plurality of said base band signals received from said buffer memory; and

said channel assign for demodulating said base band received signal and modulating said transmit data signal is done in a step of;

wherein channel assign to a plurality of said modem processing means is done in a hand-over processing executed by a mobile station moving from a first sector controlled by said RF base station to a second sector so that a second channel for demodulating a second signal received by a second antenna of said RF base station is assigned to a modem

processing means of said RF base station to which a first channel for demodulating a first signal received by a first antenna is assigned, said first signal being transmitted from said RF mobile station and forming a first sector, said second signal being transmitted from said RF mobile station and forming a second sector.

8. The control method of channel assign according to claim 7;

wherein the load of said modem processing means is checked before said second channel is assigned to said modem processing means so as not to assign said second channel to said modem processing means when said modem processing means is loaded inversely.

9. The control method of channel assign according to claim 3;

wherein channel assign to a plurality of said modem processing means is done in a hand-over processing executed by a mobile station moving from a first sector controlled by said RF base station to a second sector so that a second channel for demodulating a second signal received by a second antenna of said RF base station is assigned to a modem processing means of said RF base station to which a first channel for demodulating a first signal received by a first antenna is assigned, said first signal being transmitted from said RF mobile station and forming a first sector, said

002040" 5444350

second signal being transmitted from said RF mobile station and forming a second sector; and

said first channel for demodulating said first signal and said second channel for demodulating said second signal are held in the same modem processing means.

10. A control method of channel assign so as to execute a hand-over processing in an RF mobile station moving between sectors from a first sector controlled by a first antenna of an RF base station to a second sector controlled by a second antenna;

wherein said first channel for demodulating said first signal received by said first antenna and said second channel for demodulating said second signal received by said second antenna are assigned to the same modem processing means.

11. The control method of channel assign according to claim 10;

wherein said channel assign is done in said hand-over processing started so that channel assign to a plurality of said modem processing means of an RF base station is changed, thereby said first and second channels are assigned to the same modem processing means when it is impossible to assign a second channel newly to a modem processing means to which said first channel is already assigned.

12. A control method of channel assign;

wherein a first channel for demodulating a first frequency signal of an RF mobile station, received by a first antenna of an RF base station and a second channel for demodulating a second frequency signal of said RF mobile station, received by a second antenna of said RF base station are assigned to the same modem processing means of said RF base station.

13. The control method of channel assign according to claim 12;

wherein said channel assign is done when a second channel cannot be assigned newly to a modem processing means of said RF base station, to which said first channel is assigned so that channel assign to a plurality of said modem processing means of said RF base station is changed, thereby assigning said first and second channels to the same modem processing means.

004070" 82444500

A control method of channel assign so as to cope flexibly with voice and high speed data communication services of different transmission rates in code-division multiple connection communications. A load required for a channel processing is compared with an allowable load, thereby a channel is assigned within the allowable load. When assignment of a busy channel is changed so as to be processed in another hardware, the synchronization of the processing is established first in the destination, then the channel is switched to another. It is thus possible to distribute hardware resources and software processings efficiently to users.

FIG. 1

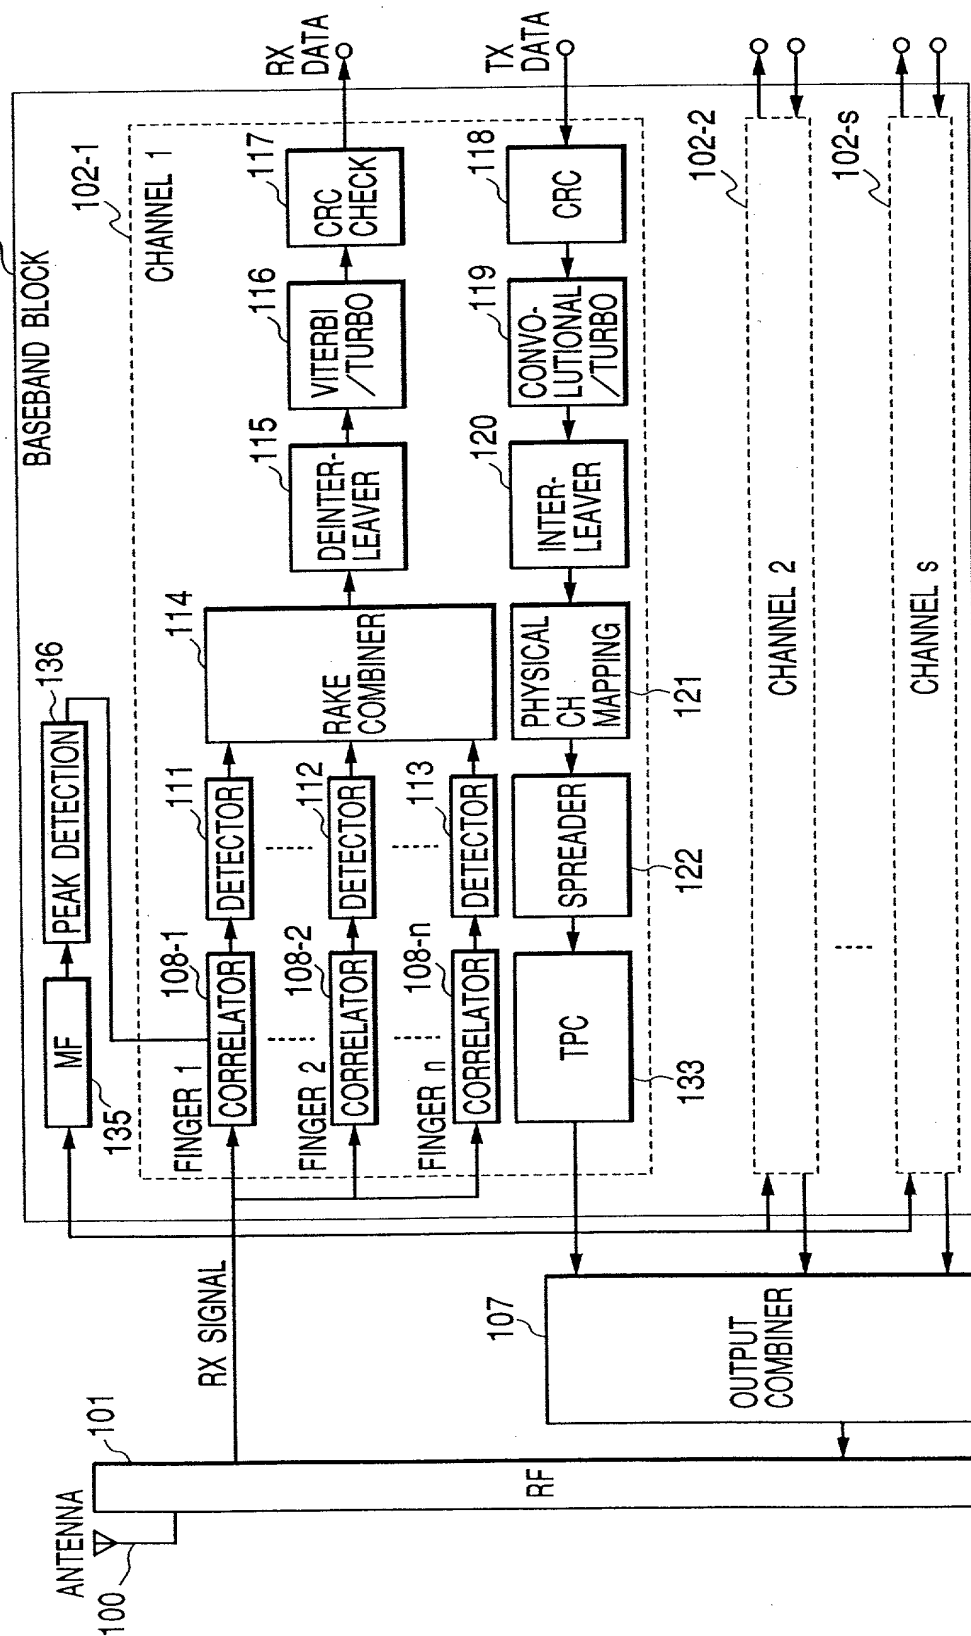


FIG. 2

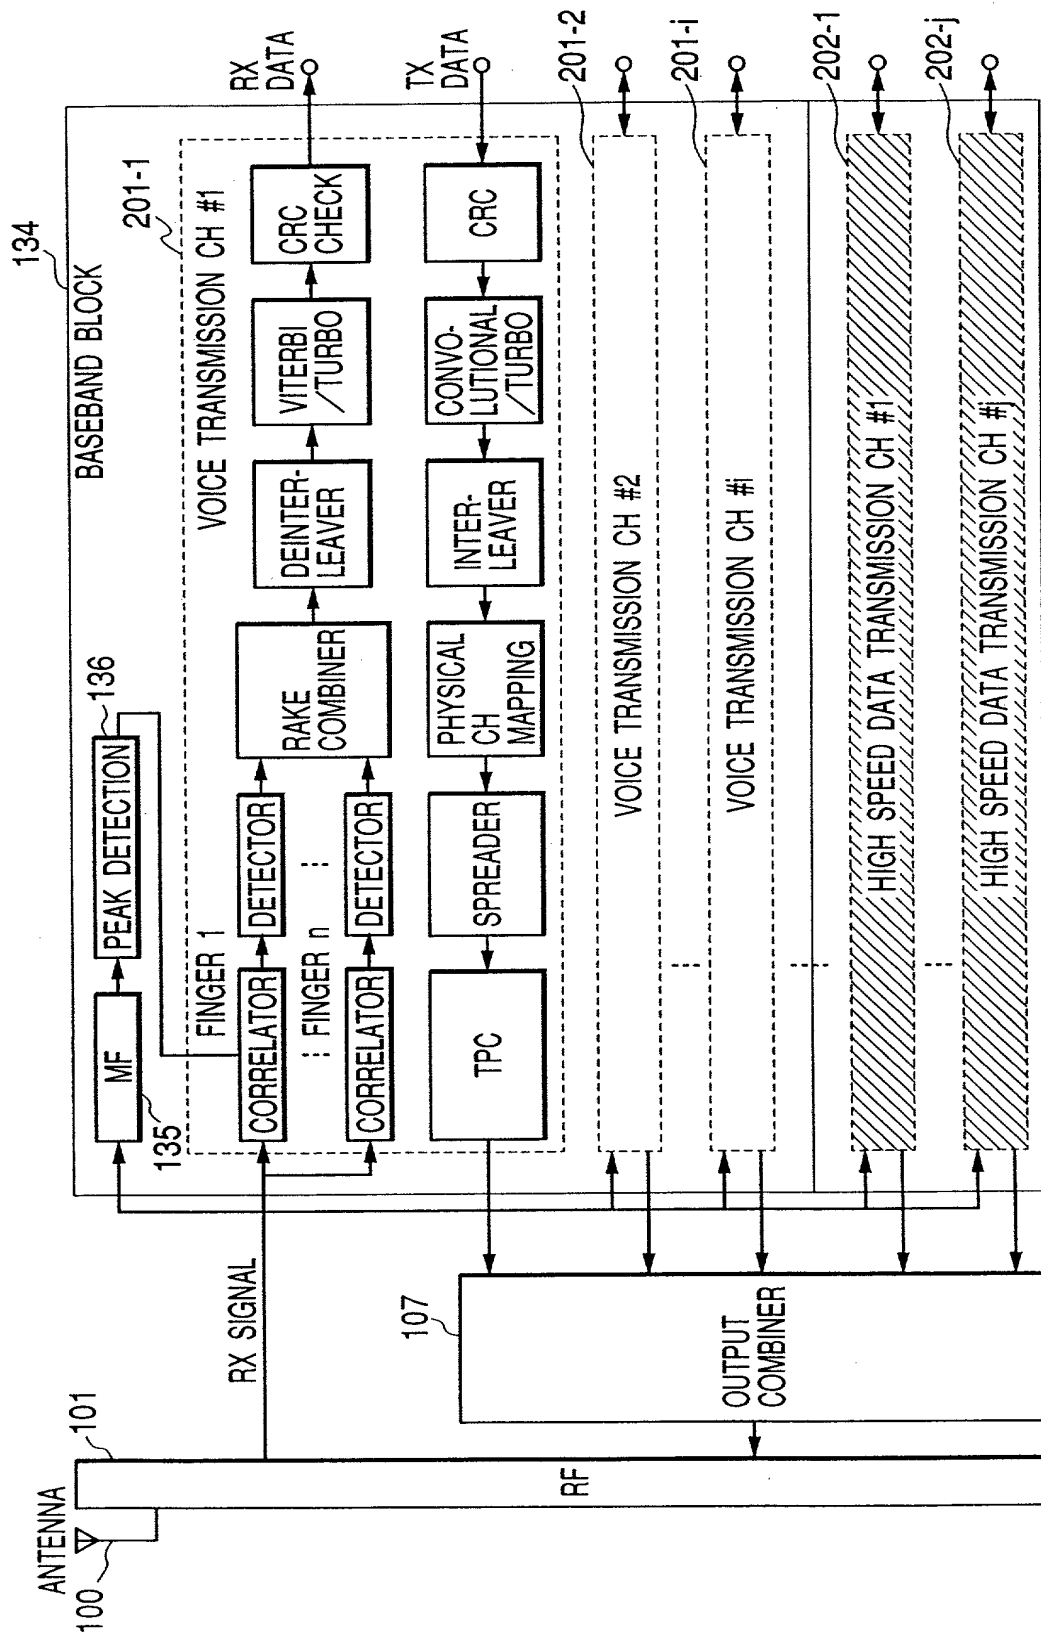


FIG. 3

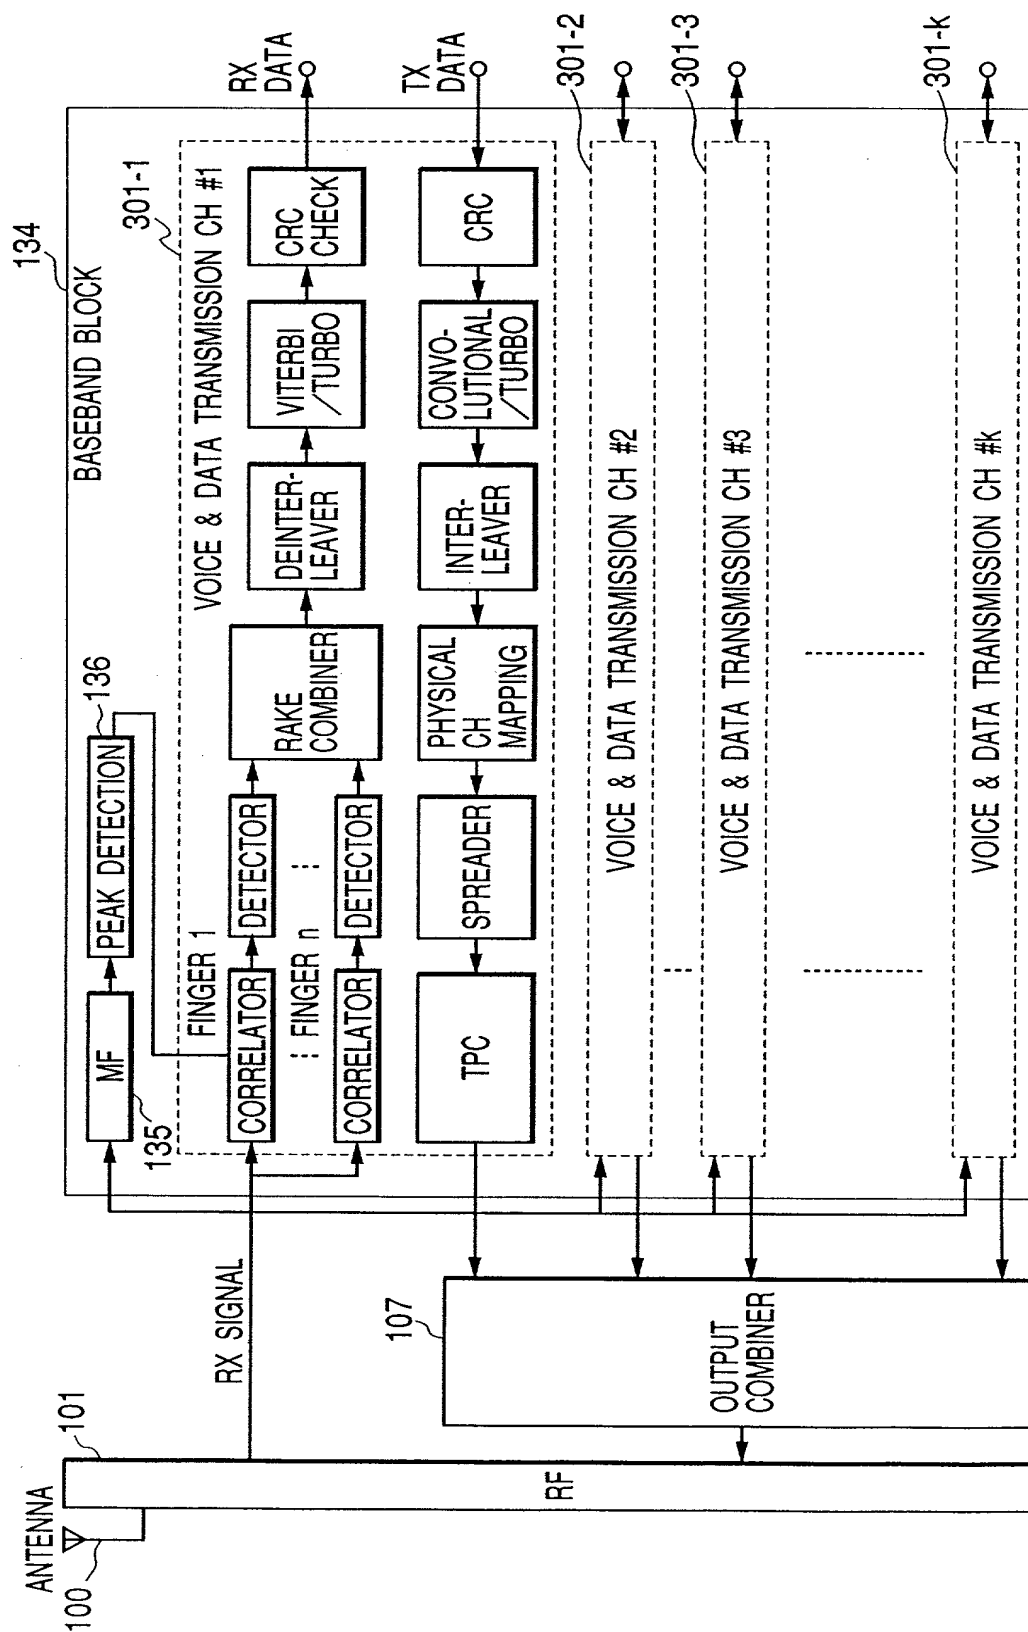


FIG. 4

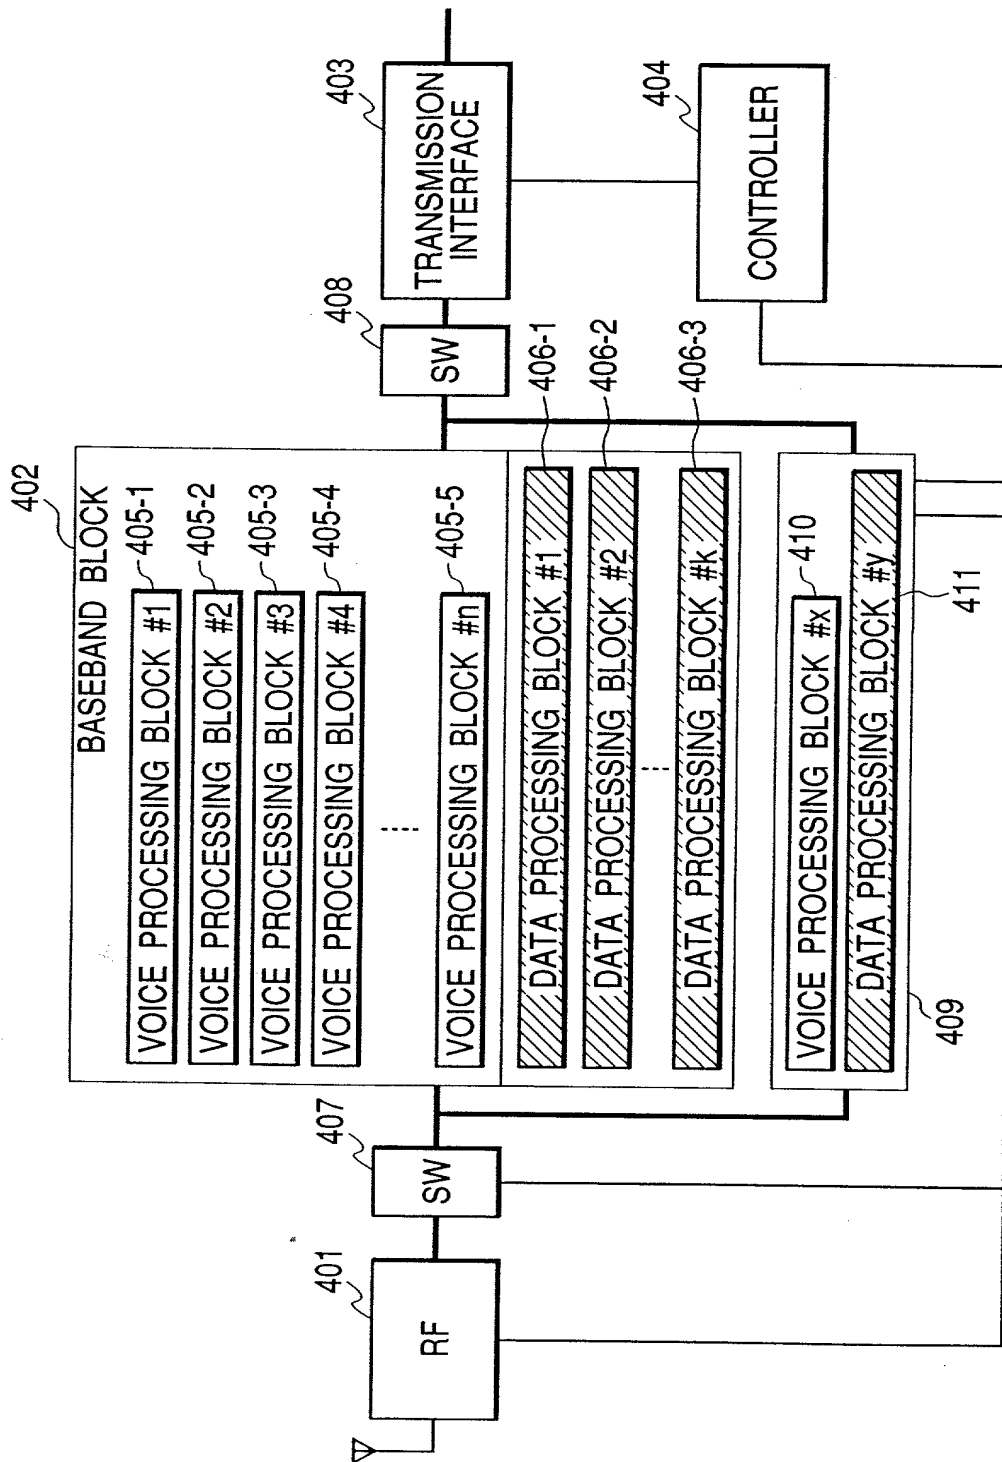


FIG. 5

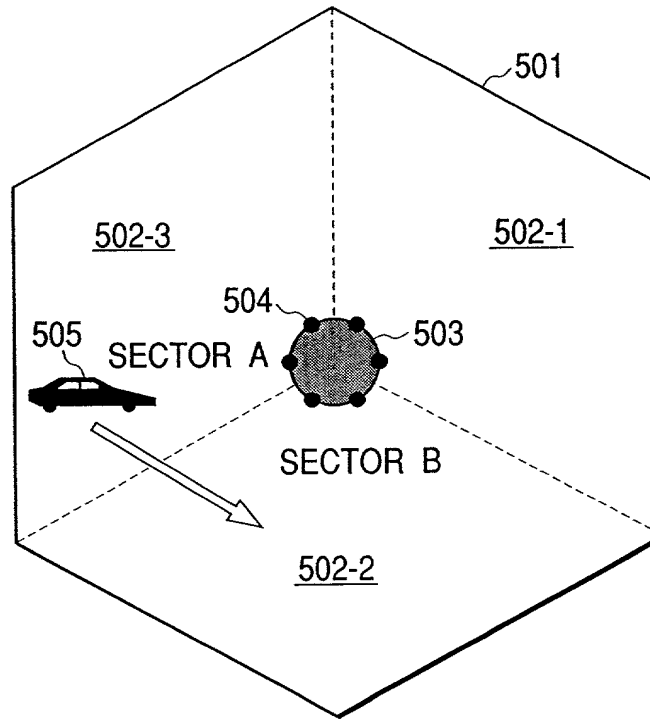


FIG. 6

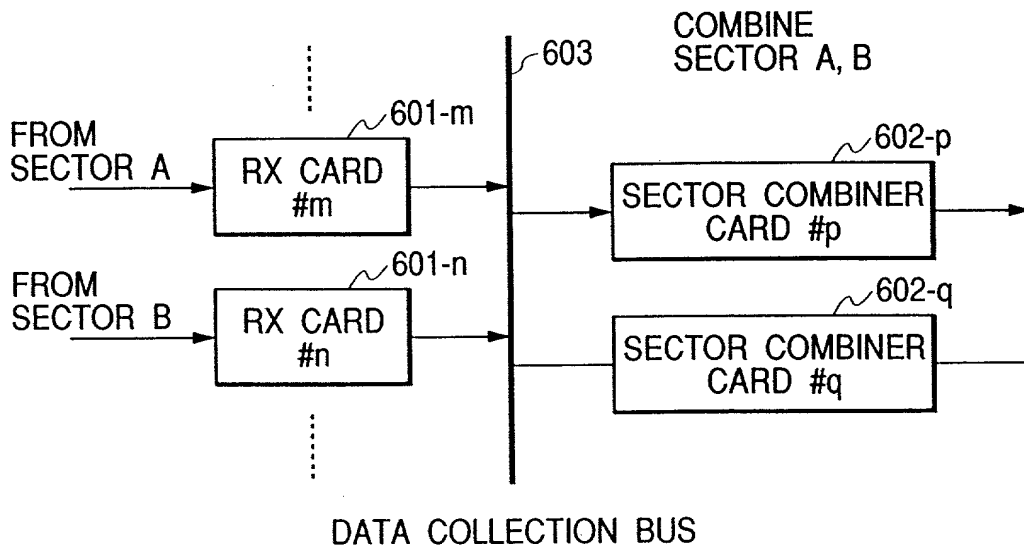


FIG. 8

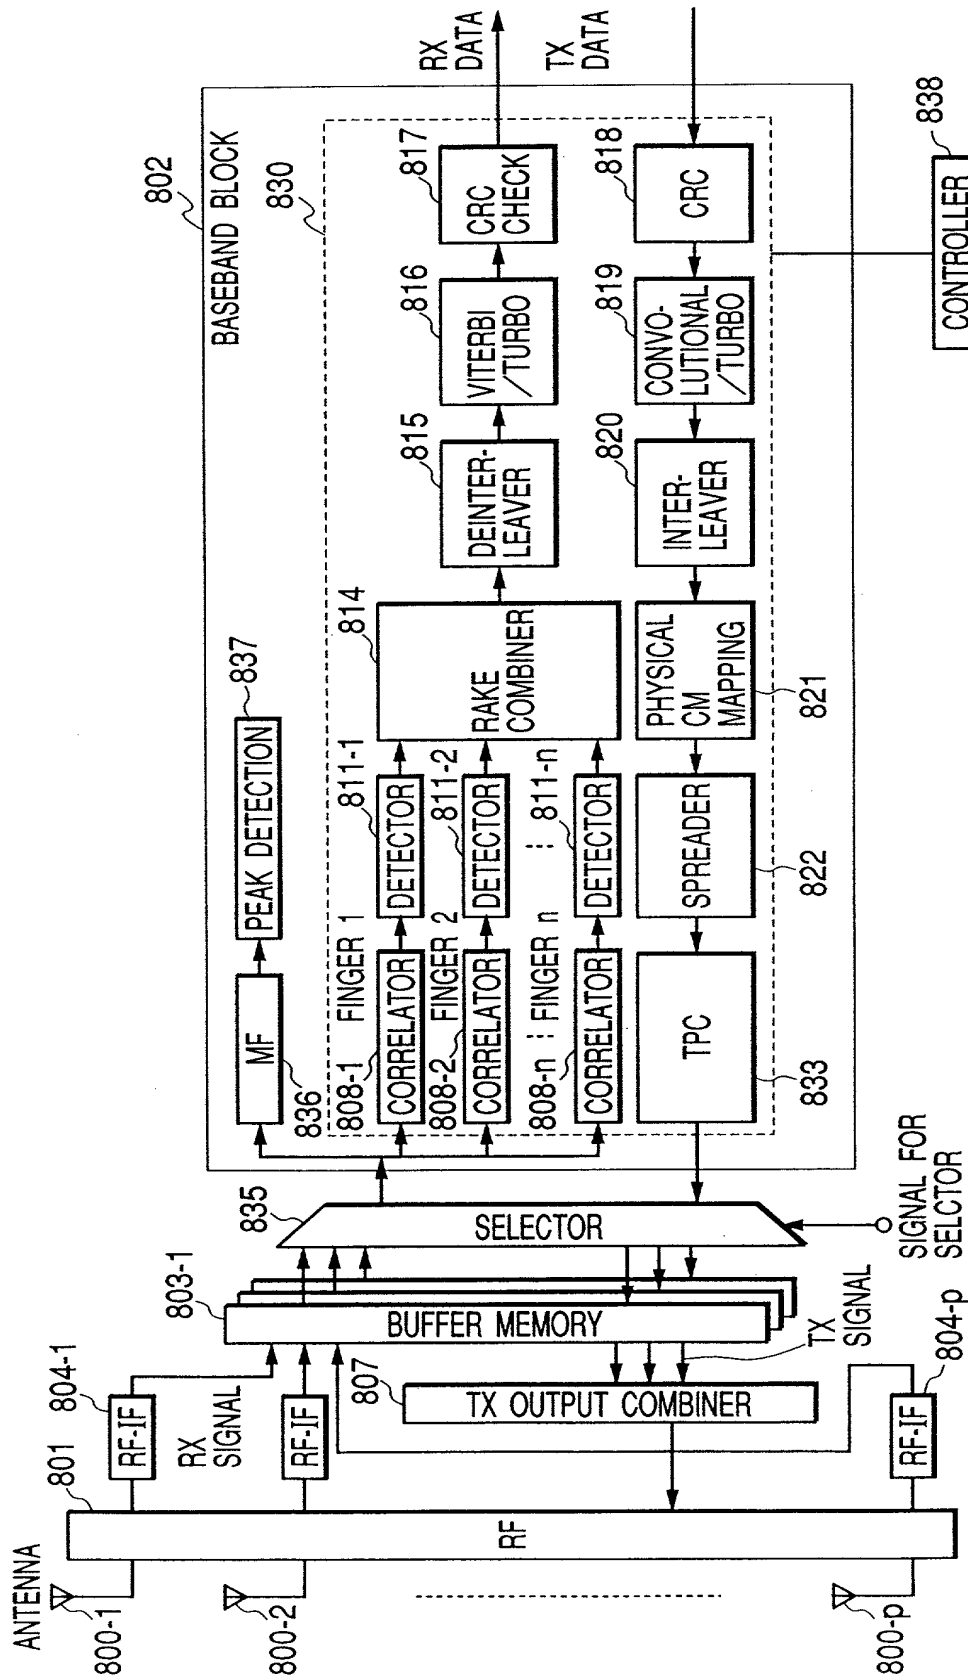


FIG. 9

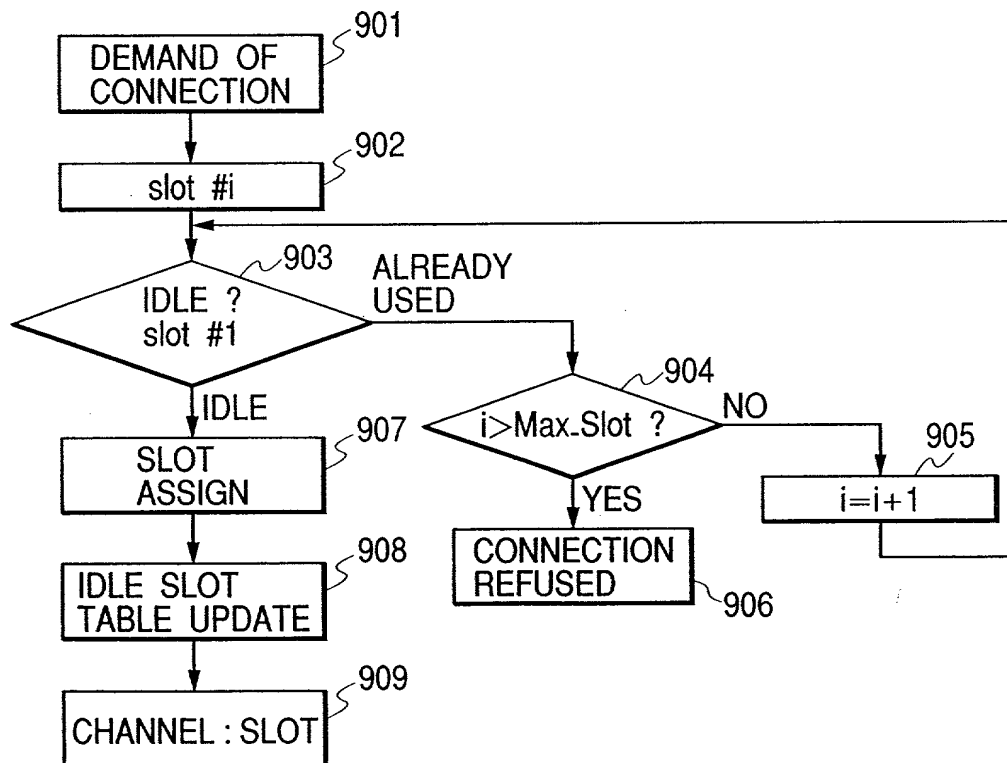


FIG. 10

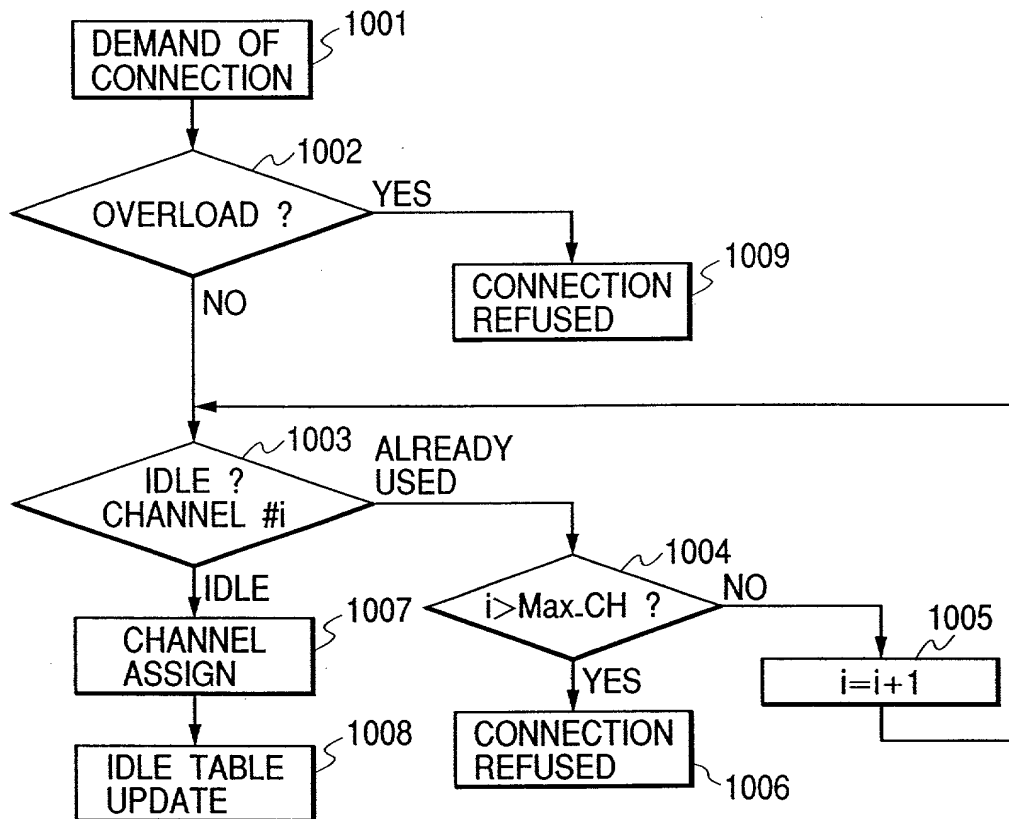


FIG. 13


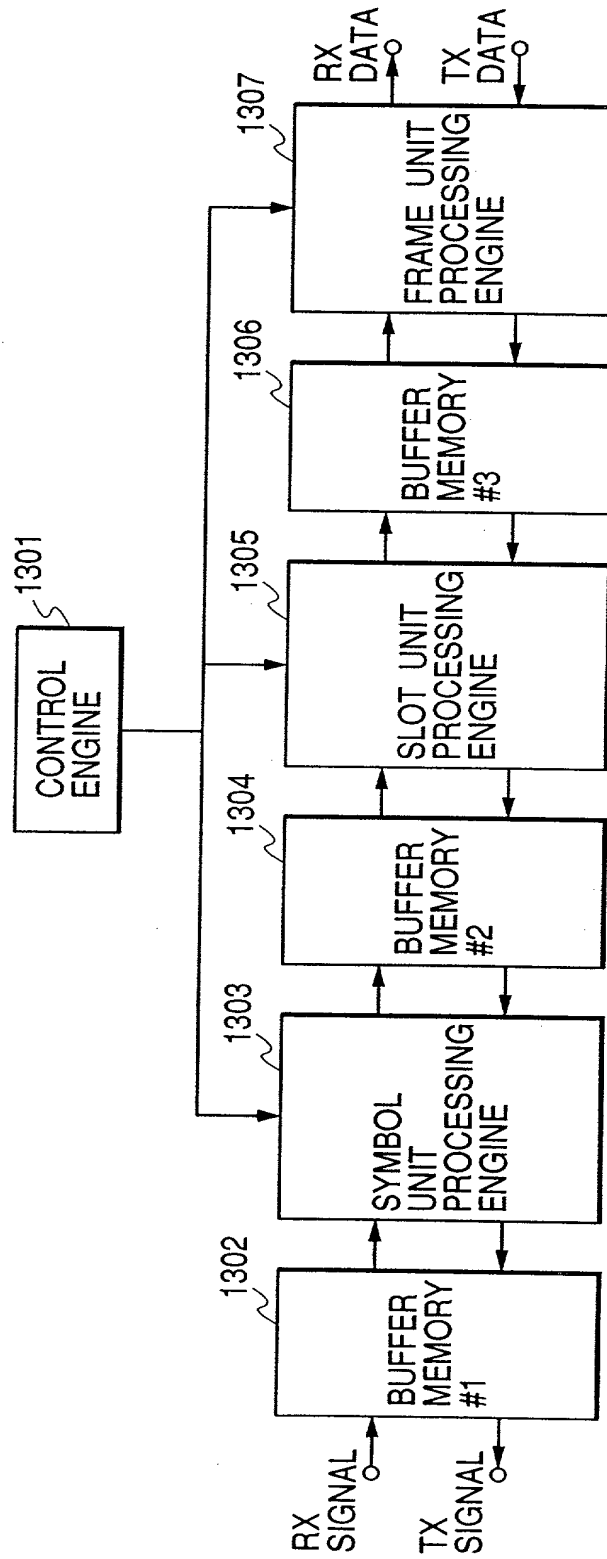


FIG. 14

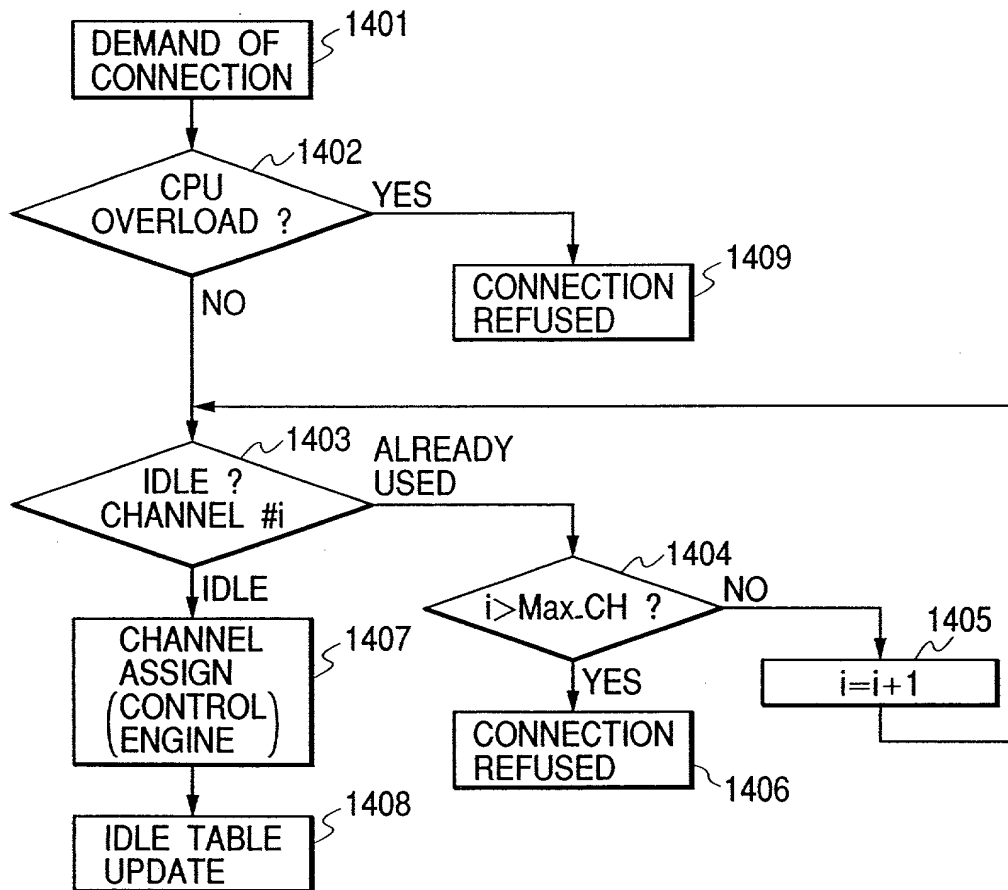

The flowchart illustrates the CPU overload control process, starting with a 'DEMAND OF CONNECTION' (1501) leading to a decision 'CPU OVERLOAD?' (1502). If 'YES', it proceeds to 'CHECK NEXT CPU' (1508). If 'NO', it goes to 'IDLE? CHANNEL #i' (1503). From 1503, the 'ALREADY USED' path leads to 'i > Max.CH?' (1504). If 'YES' (1506), it increments 'i=i+1' (1505) and loops back to 1503. If 'NO' (1504), it proceeds to 'CHANNEL ASSIGN (CONTROL) (ENGINE)' (1507), then 'IDLE TABLE UPDATE' (1507), and loops back to 1502. The 'IDLE' path from 1503 leads to 'CHANNEL ASSIGN (CONTROL) (ENGINE)' (1507), then 'IDLE TABLE UPDATE' (1507), and loops back to 1502. The 'CHECK NEXT CPU' (1508) path leads to 'IDLE? CHANNEL #i' (1509). From 1509, the 'ALREADY USED' path leads to 'i > Max.CH?' (1510). If 'YES' (1512), it increments 'i=i+1' (1511) and loops back to 1509. If 'NO' (1510), it proceeds to 'CHANNEL ASSIGN (CONTROL) (ENGINE)' (1512), then 'IDLE TABLE UPDATE' (1513), and loops back to 1502.

FIG. 16

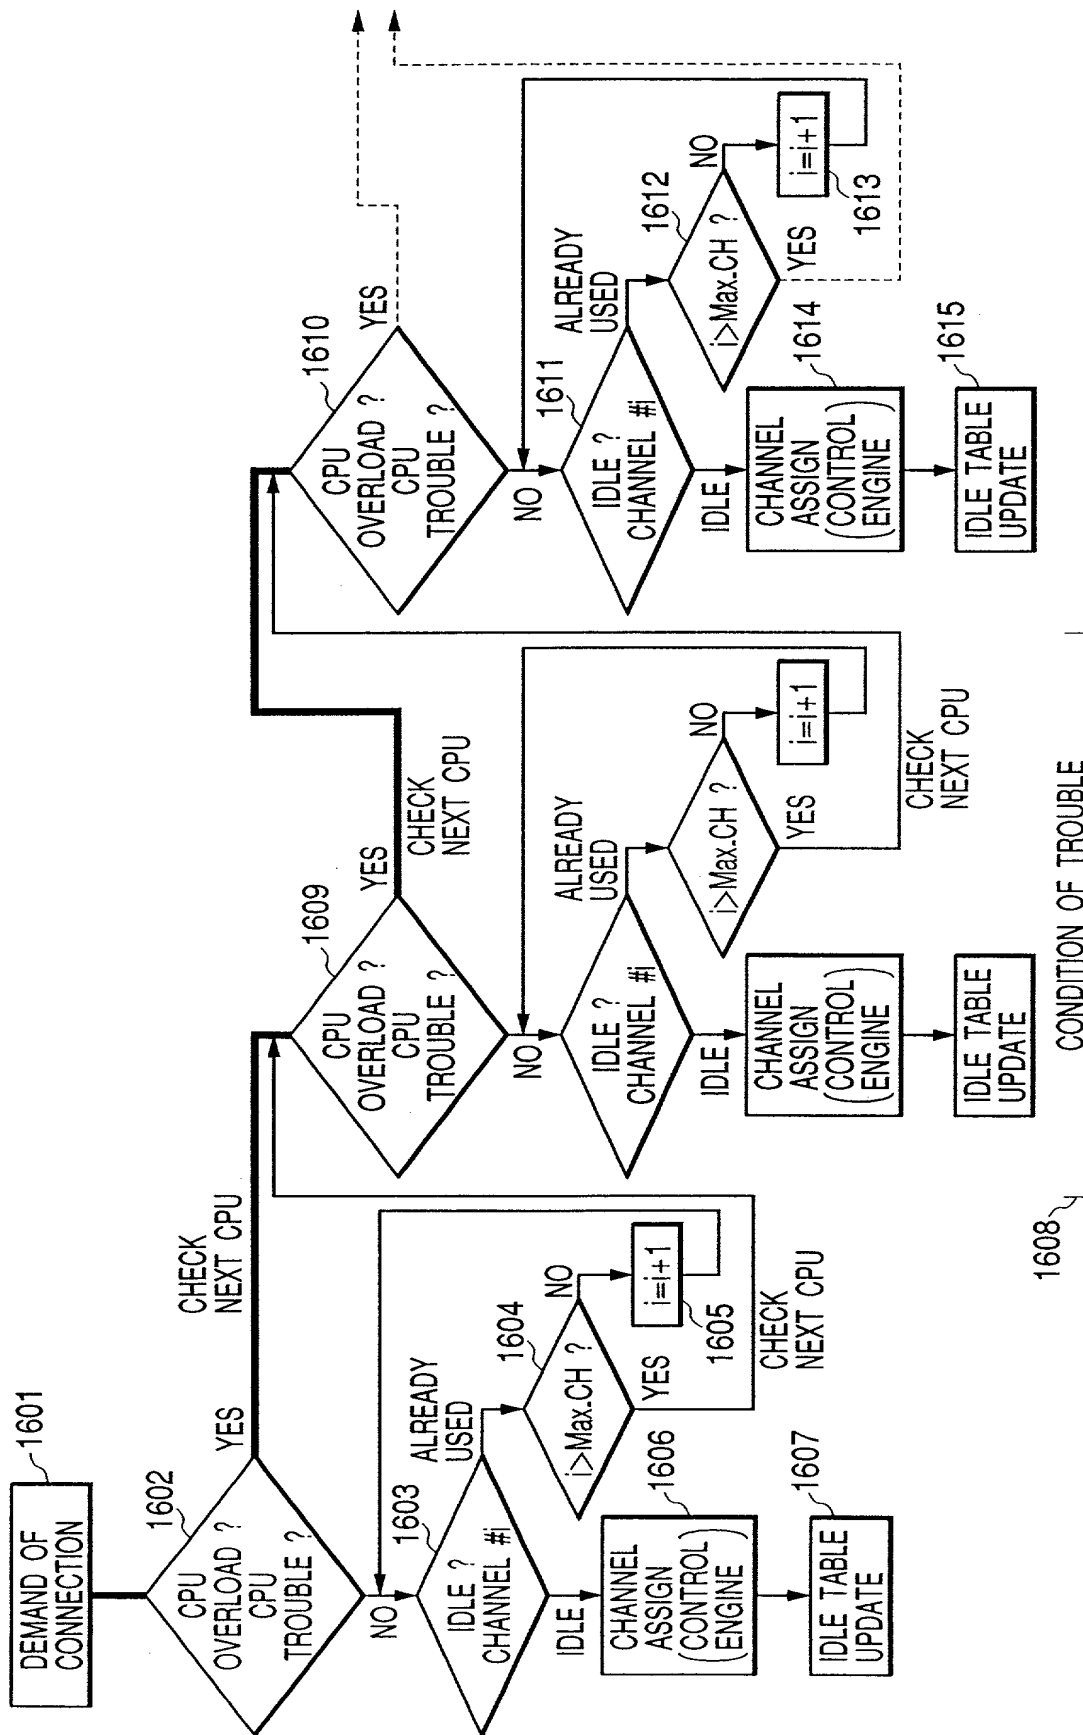


FIG. 17

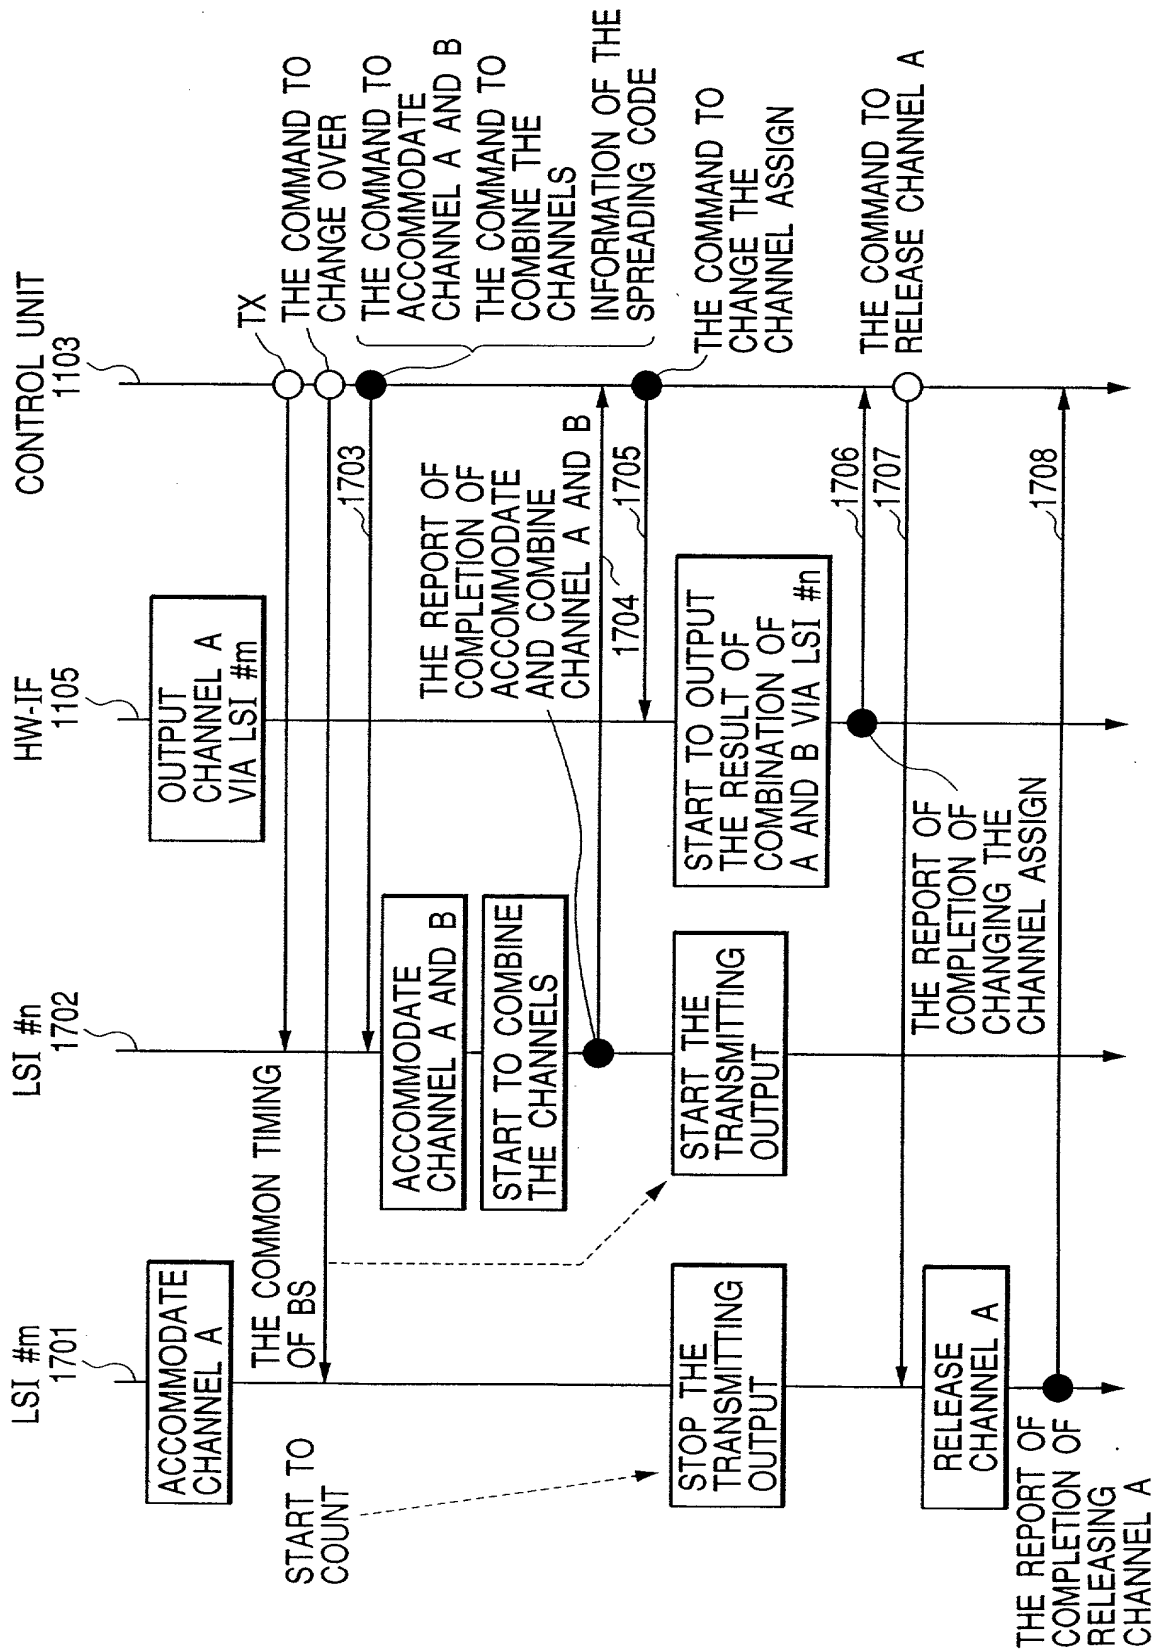


FIG. 18



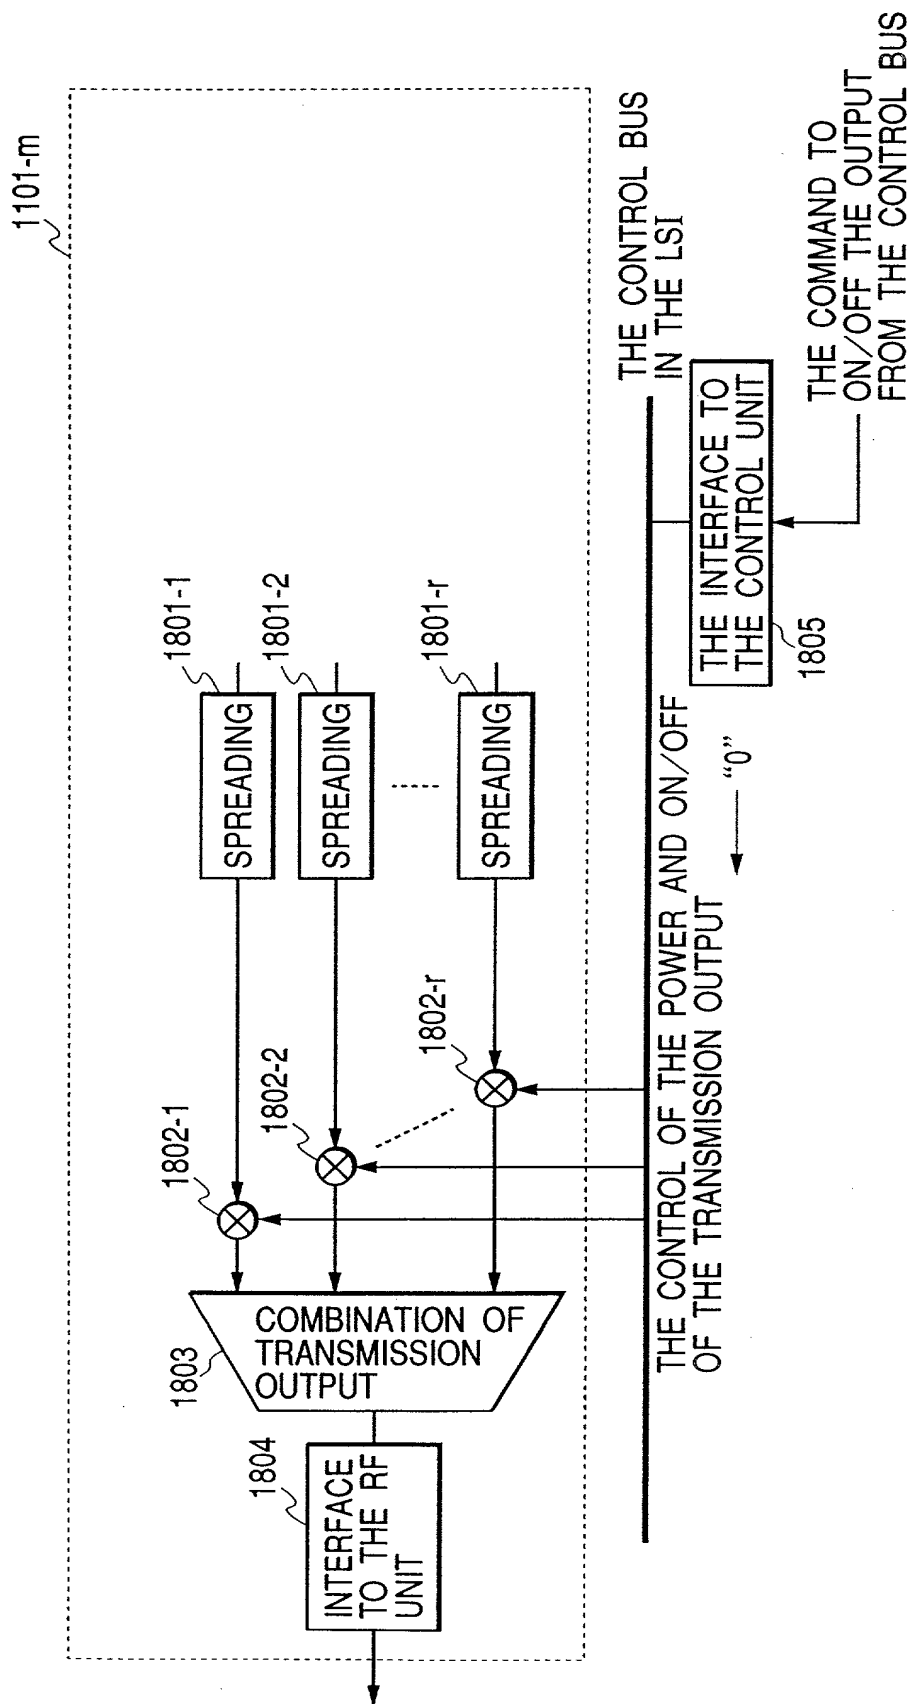


FIG. 19

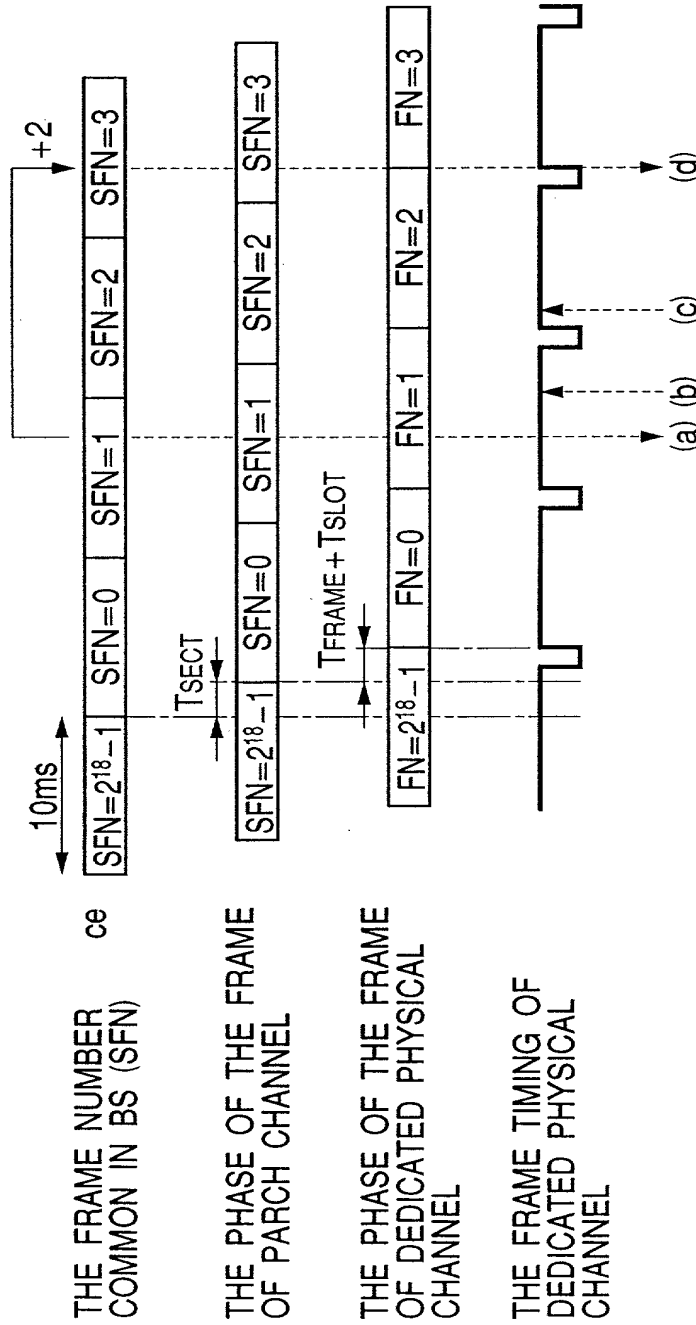

- (a) CONTROL UNIT DECIDES TO SWITCH THE CHANNELS, GET BS REFERENCE SFN, AND SEND THE COMMAND TO SWITCH
- (b) THE COMMAND REACHES LSI #n
- (c) THE COMMAND REACHES LSI #m
- (d) EACH LSI EXECUTES THE SWITCHING

FIG. 20

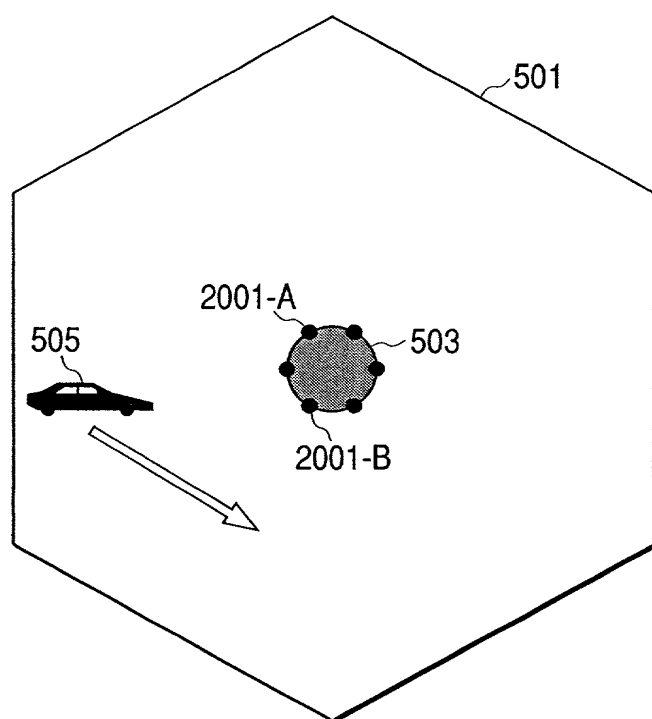

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CONTROL METHOD OF CHANNEL ASSIGN

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約
国際出願番号を_____とし、
(該当する場合) _____に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-107539	Japan
(Number)	(Country)
(番号)	(国名)
(Number)	(Country)
(番号)	(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

15 / April / 1999
(Day/Month/Year Filed)
(出願年月日)

☐

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁理士、または代理人の氏名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*list name and registration number*)

Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

書類送付先

Send Correspondence to:

Antonelli, Terry, Stout & Kraus, LLP
Suite 1800
1300 North Seventeenth Street
Arlington, Virginia 22209

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: (*name and telephone number*)

Telephone: (703) 312-6600
Fax: (703) 312-6666

唯一または第一発明者名	Full name of sole or first inventor Seishi HANAOKA	
発明者の署名	日付	Inventor's signature <i>Seishi Hanaoka</i> Date 3/17/2000
住所	Residence Kodaira, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第二共同発明者名	Full name of second joint inventor, if any	
	Yusuke UCHIDA	
第二共同発明者の署名	日付	Second inventor's signature Date
		<i>Yusuke Uchida</i> 3/22/2000
住所	Residence	
	Tokyo, Japan	
国籍	Citizenship	
	Japan	
私書箱	Post Office Address	
	c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第三共同発明者名	Full name of third joint inventor, if any	
	Nobukazu DOI	
第三共同発明者の署名	日付	Third inventor's signature Date
		<i>Nobukazu doi</i> 3/23/2000
住所	Residence	
	Hachioji, Japan	
国籍	Citizenship	
	Japan	
私書箱	Post Office Address	
	c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第四共同発明者名	Full name of fourth joint inventor, if any	
第四共同発明者の署名	日付	Fourth inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	
第五共同発明者名	Full name of fifth joint inventor, if any	
第五共同発明者の署名	日付	Fifth inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	